

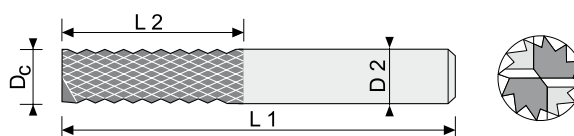
Frese per materiali compositi - taglio incrociato con taglio frontale Z=2 - norma interna

Drill slot milling cutters - cross cut - Internal standard

Settori d'impiego / Range of application

A: Leghe leggere / Light alloys
A1.7

B: Plastiche - Plastiche rinforzate con fibre
B: Plastics - Reinforced plastic fibres
(AFK - CFK - GFK) - B1.4 B1.1-1.3 B2.1-2.4

108F**108M****108G**

HM
CK20-30-MG
Micrograin

WN



D _c h10	L2	L1	D2 h6	108F	108M	108G
2	7	40	2	108F.020020740	108M.020020740	108G.020020740
2	7	50	6	108F.020060750	108M.020060750	108G.020060750
3	10	40	3	108F.030031040	108M.030031040	108G.030031040
3	12	50	6	108F.030061250	108M.030061250	108G.030061250
3,5	12	40	3,5	108F.035351240	108M.035351240	108G.035351240
4	15	40	4	108F.040041540	108M.040041540	108G.040041540
4	20	50	6	108F.040062050	108M.040062050	108G.040062050
4,5	15	50	4,5	108F.045451550	108M.045451550	108G.045451550
5	16	50	5	108F.050051650	108M.050051650	108G.050051650
5	25	75	6	108F.050062575	108M.050062575	108G.050062575
6	18	50	6	108F.060061850	108M.060061850	108G.060061850
6	35	75	6	108F.060063575	108M.060063575	108G.060063575
7	22	60	7	108F.070072260	108M.070072260	108G.070072260
8	25	63	8	108F.080082563	108M.080082563	108G.080082563
8	40	100	8	108F.0800840100	108M.0800840100	108G.0800840100
9	25	63	9	108F.090092563	108M.090092563	108G.090092563
10	30	72	10	108F.100103072	108M.100103072	108G.100103072
12	32	83	12	108F.120123283	108M.120123283	108G.120123283
14	32	83	14	108F.140143283	108M.140143283	108G.140143283
16	36	92	16	108F.160163692	108M.160163692	108G.160163692
18	40	92	18	108F.180184092	108M.180184092	108G.180184092
20	45	104	20	108F.2002045104	108M.2002045104	108G.2002045104
Tagliente tipo Cut type				F fine F fine 	M medio M medium 	G grosso G course 