

# Punzoni testa svasata DIN 9861 forma "DA" HWS – HSS

- Materiale: 1.2080 – HWS / 1.3343 – HSS
- Tolleranza: d h6
- Durezza: HRC 61/64


Punzoni hws – hss  
1.5 x 71  
10 x 125

Cod.  
2PU  
2PU

Mat. Mis.  
HWS 0150071  
HSS 1000125

Rigonfiamento massimo  
0.05 / 0.06 mm  
per 1 / 2 mm.

Made in Italy

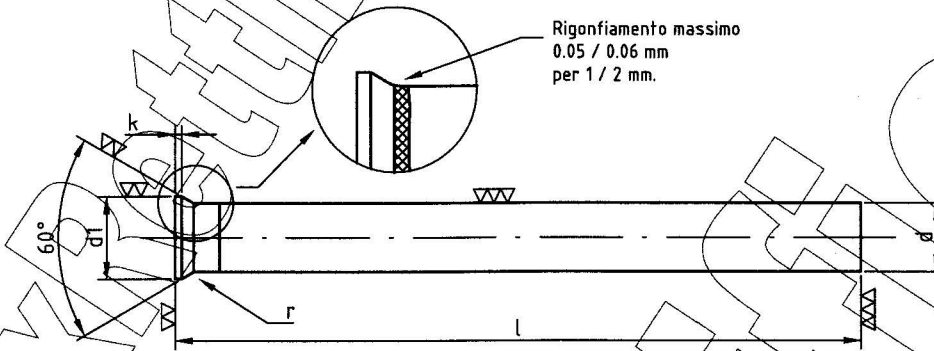

d	Punzoni 1.2080 – HWS forma "DA"				Punzoni 1.3343 – HSS forma "DA"			
	l				l			
	71	80	100	125	71	80	100	125
1 – 1.9	•	•	•	•	•	•	•	•
2 – 3	•	•	•	•	•	•	•	•
3.1 – 4	•	•	•	•	•	•	•	•
4.1 – 5	•	•	•	•	•	•	•	•
5.1 – 6	•	•	•	•	•	•	•	•
6.1 – 7	•	•	•	•	•	•	•	•
7.1 – 8	•	•	•	•	•	•	•	•
8.1 – 9	•	•	•	•	•	•	•	•
9.1 – 10	•	•	•	•	•	•	•	•
10.1 – 11	•	•	•	•	•	•	•	•
11.1 – 12	•	•	•	•	•	•	•	•
12.1 – 12.4	•	•	•	•	•	•	•	•
12.5 – 13	•	•	•	•	•	•	•	•
13.5 – 14	•	•	•	•	•	•	•	•
14.5 – 15	•	•	•	•	•	•	•	•
15.5 – 16	•	•	•	•	•	•	•	•
16.5 – 17	•	•	•	•	•	•	•	•
17.5 – 18	•	•	•	•	•	•	•	•
18.5 – 19	•	•	•	•	•	•	•	•
19.5 – 20	•	•	•	•	•	•	•	•

- \* Per la lunghezza 125 mm disponibili solo misure piene e mezze.
- \* Dal diametro 12.5 in su i prezzi si intendono per misure piene e mezze.
- \* Per le dimensioni della testa **vedere tabella pagina 18.4.**
- \* Si costruiscono a richiesta punzoni ribassati, **vedere pagina 1.11.**