


# Viti a colletto

- ☐ Materiale: ISO 12.9
- ☐ Tolleranza: d h8
- ☐ Resistenza a trazione: 110-120 Kg/mm<sup>2</sup>
- ☐ Limite di elasticità: 90 Kg/mm<sup>2</sup> min.
- ☐ Allungamento: 9% min.

Esempio di ordinativo con nostro codice

Viti a colletto	Cod.	Mat.	Mis.
4MA x 5 x 10	2V	C	0405010
20MA x 24 x 200	2V	C	2024200

Made in Italy

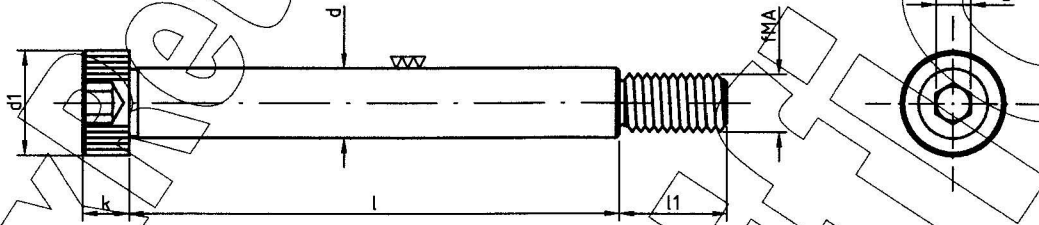

d1	8	10	13	16	18	24	30	36
k	4	4.5	5.5	7	9	11	14	16
l1	8	9.5	11	13	16	18	22	27
s	2.5	3	4	5	6	8	10	12
fMA	4	5	6	8	10	12	16	20
d h8	5	6	8	10	12	16	20	24
l								
10	D •	D •	D •					
12	D •	D •	D •					
15	D •	D •	D •	D •	D •			
16	D •	D •	D •	D •	D •			
20	D •	D •	D •	D •	D •			
25	D •	D •	D •	D •	D •	B •		
30	D •	D •	D •	D •	D •	B •	A •	
35	D •	D •	D •	D •	D •	B •	A •	
40	D •	D •	D •	D •	D •	B •	A •	A •
45	D •	D •	D •	D •	D •	B •	A •	A •
50	D •	D •	D •	D •	D •	B •	A •	A •
55		D •	D •	D •	D •	B •	A •	A •
60		D •	D •	D •	D •	B •	A •	A •
65		D •	D •	D •	D •	B •	A •	A •
70		D •	D •	D •	D •	B •	A •	A •
80		D •	D •	D •	D •	B •	A •	A •
90			D •	D •	D •	B •	A •	A •
100			D •	D •	D •	B •	A •	A •
110				D •	D •	B •	A •	A •
120				D •	D •	B •	A •	A •
140					D •	B •	A •	A •
160						B •	A •	A •
200						B •	A •	A •

Lettera	A	B	D
Quantità per confezione	5	10	25